


PLAN

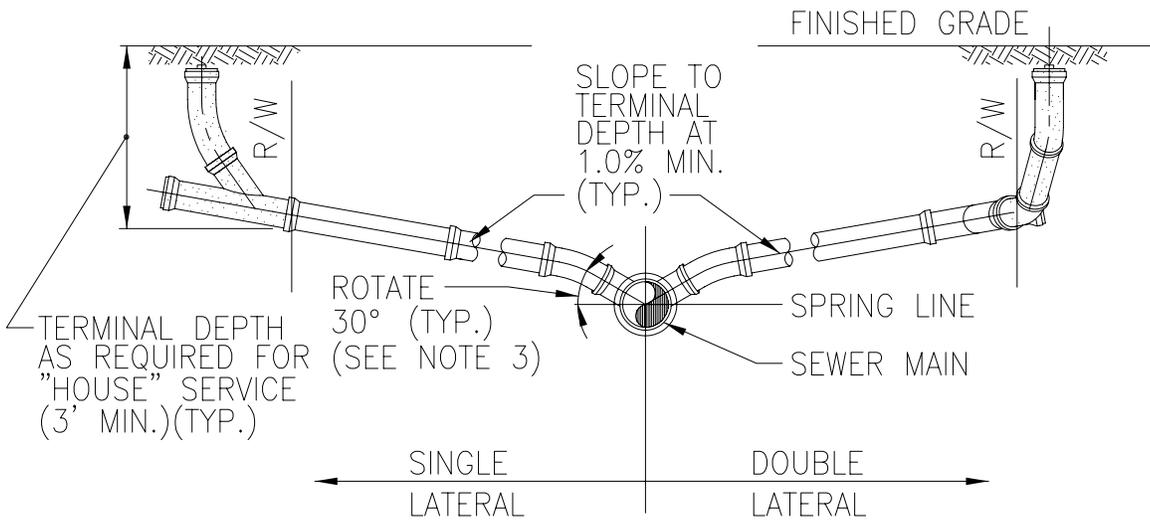

PROFILE

NOTES:

1. CLEAN-OUT (SHOWN SHADED) SHALL BE INSTALLED BY THE BUILDER IN ACCORDANCE WITH STANDARD PLUMBING CODE.
2. LOCATE SINGLE LATERAL AS CLOSE TO LOT LINE AS POSSIBLE, 25' MAXIMUM.
3. INVERT OF SERVICE LATERAL SHALL NOT ENTER SEWER MAIN BELOW SPRING LINE.

CITY OF MASCOTTE UTILITIES DEPARTMENT

SERVICE LATERAL DETAIL

DATE:

DWG: WWLAT

FIG: 204